
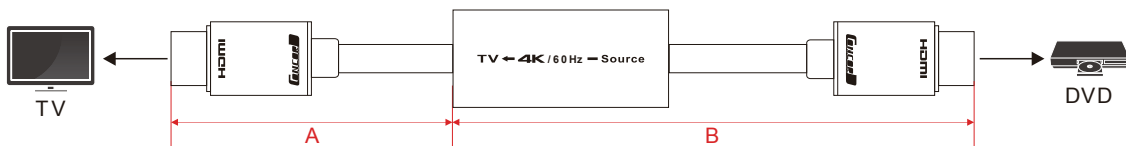


18G Enhanced HDMI 2.0 Cable, 28AWG

1 Appearance

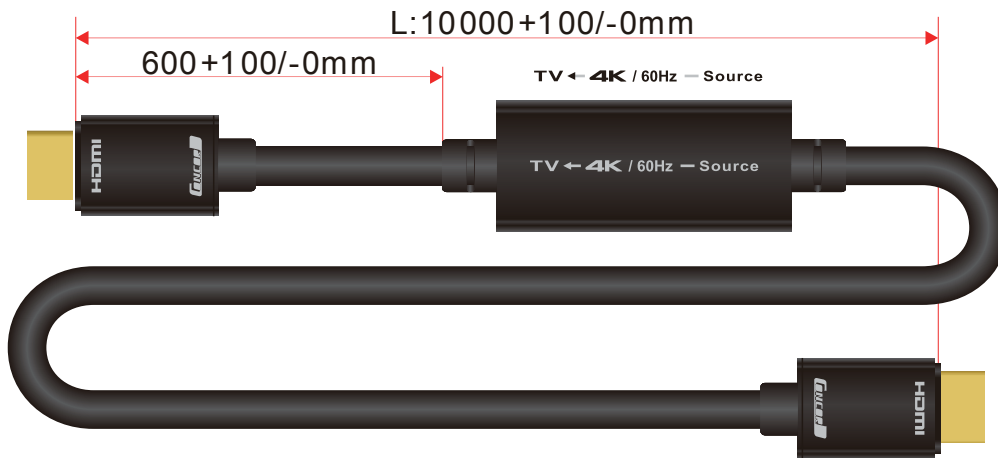


| No. | Cable Length | A | B |
|-------|--------------|------|------|
| CC278 | 10.0m | 0.6m | 9.4m |

- Support HDR TV
- Wide Frequency Range: 25MHz-600MHz
- Supports 12-bit Deep Full HD, Full 3D and 4 Kx2K 60Hz video

2 Cable specs:

01-1189B

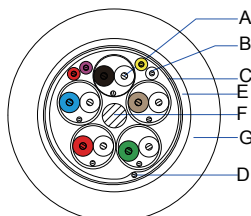

| | | |
|---|-----------|---|
| A | Conductor | Ø0.127mm/7,28AWG OFC tinned copper wires |
| | Insulator | Ø1.0±0.05mm FPE+SKIN |
| | | Pair twist (blue/white, black/white, brown/white, green/white, red/white) |
| | Drain | Ø0.1mm/7,30AWG OFC tinned copper wires |
| | Shield | Aluminium foil |
| | Mylar | Transparent melting mylar |
| B | Conductor | Ø0.1mm/7, 30AWG OFC tinned copper wires |
| | Insulator | Ø0.63±0.05mm HDPE (red, purple, yellow, white) |
| C | Shield | Aluminium foil |
| D | Drain | Ø0.1mm/7, OFC bare copper wires |
| E | Shield | Ø0.12mm/16×4, aluminium braided |
| F | Filler | Filler |
| G | Jacket | Ø7.3mm PVC in black color |